

8UP Dry-Peel ID Cards

P15G

- Dry-Peel adhesive technology for ease of use
- Smooth edges and rounded corners for professional finish
- Waterproof, tear-proof, greaseproof
- No need to laminate
- Great for memberships, business cards, IDs, and MUCH MORE!

Recommended Conditions:

Printroom	50°F - 86°F 10°C - 30°C	40% - 55% RH
Usage	-40°F - 248°F -40°C - 120°C	10% - 100% RH
Storage	50°F - 68°F 10°C - 20°C	20% - 55% RH

Compatibility Guidance:


Suitable for most thermal transfer and dry toner (laser/LED/flash fusion) print processes, both mono and color small-volume, mid-volume & production machines. User must establish for themselves the optimum settings and paper path, being aware of the thickness and weight of the material.



KERNOW
NORTH AMERICA

(855) 537-6691 | info@kernowna.com | www.kernowna.com

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application.

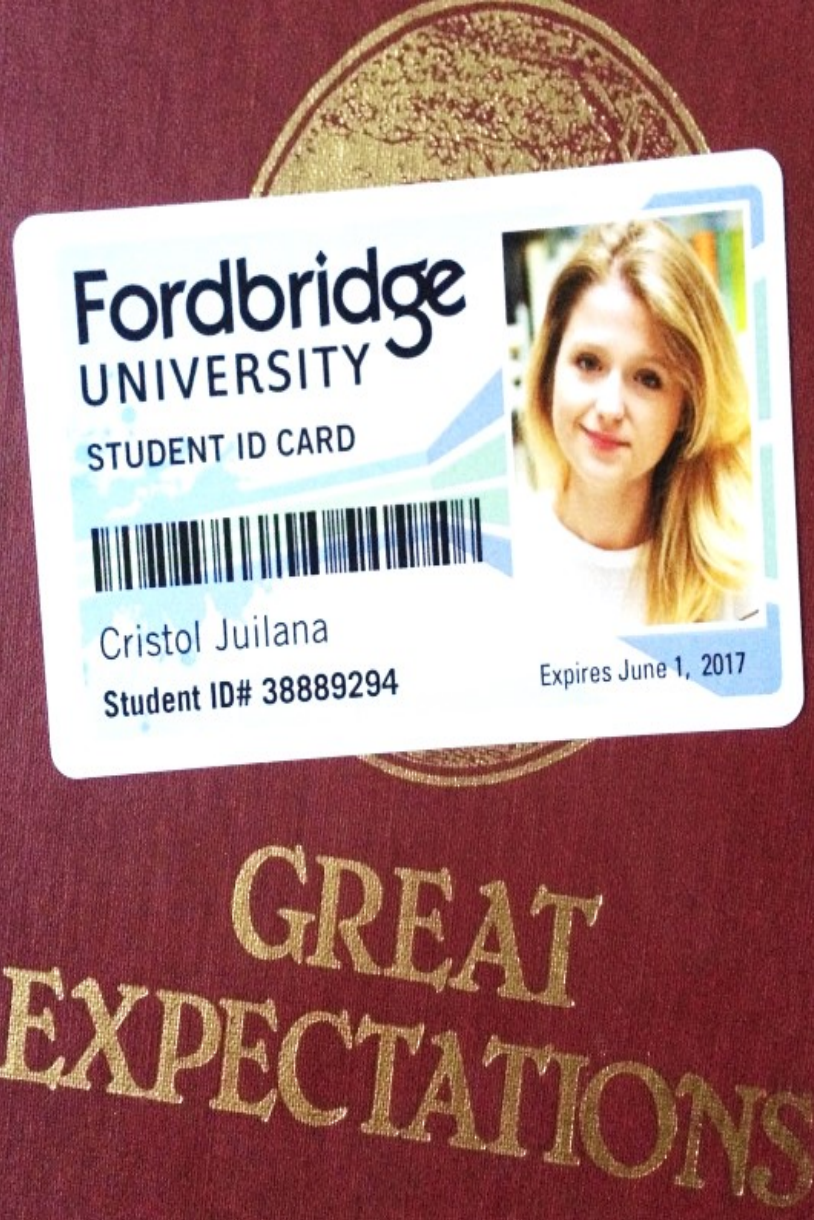

Thickness:

195
μ

8
mil

260
gsm

Available sizes:

8.27x11.69"