

3UP Door Hanger

P15Y

- Pre-perforated and print ready to personalise
- Matte white opaque suitable for full color duplex printing
- Waterproof, tear-proof, greaseproof
- No need to laminate

Please Note: Keep all print a minimum of 4mm away from all perforations. Fold all perforations in both directions for easy removal of pieces from the sheet

Recommended Conditions:

Printroom	50°F - 86°F 10°C - 30°C	40% - 55% RH
Usage	-40°F - 248°F -40°C - 120°C	10% - 100% RH
Storage	50°F - 68°F 10°C - 20°C	20% - 55% RH


Compatibility Guidance:

Suitable for most thermal transfer and dry toner (laser/LED/flash fusion) print processes, both mono and color small-volume, mid-volume & production machines. User must establish for themselves the optimum settings and paper path, being aware of the thickness and weight of the material.



(855) 537-6691 | info@kernowna.com | www.kernowna.com

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application.

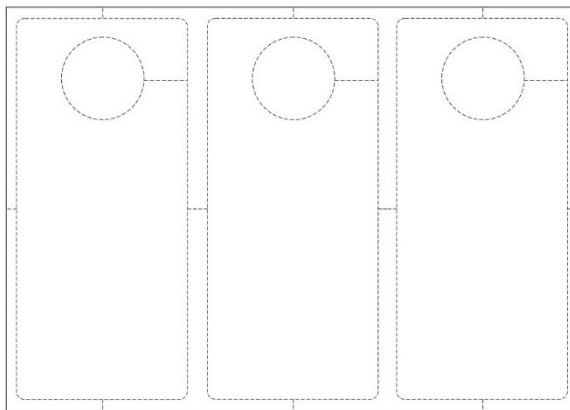

Thickness:

Available sizes:

195
μ

8
mil

260
gsm

8.5"x11"